

AQUA RIPPER


SEVIER



7007

To avoid this boat's damage and player's injury, please read this instruction before playing!


1. Know the remote controller 2. install battery for controller.

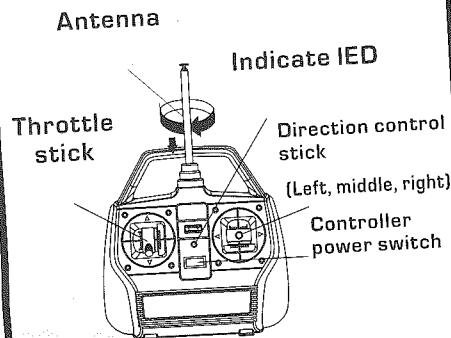

Open the cover of battery case; insert 8 batteries (size AA) properly according to the illustration shows. (Batteries to be purchased)

- Note: 1) Do not mix new and old dry-cell battery together in use.
2) Do not mix rechargeable battery and dry-cell battery together in use.


Batteries 8xsize AA

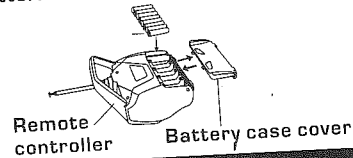

3. Charge battery of the boat


Connect battery with adapter, and then plug the adapter into 110V/220V electrical power outlet. The full charge time will take 5 hours long. After this, battery will turn warmer in the surface, and you can put battery to use.

- Note: 1) Be sure the electric voltages in your living conditions suit the adapter; plug the adapter into power outlet correctly.
2) Be sure the battery is empty before recharging it.
3) The battery is overheated when recharge time is too long, which can cause the damage, even make the battery failure. Do not over-charge it.
4) Recharge time will become longer after battery has been charged for several times.

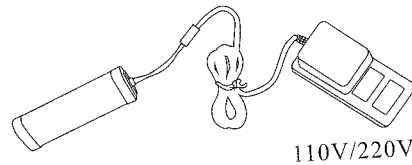


4. Install battery of the boat


- 1) First be sure turn the power switch of the boat off; then install battery into the boat. After this, keep your finger or any parts of your body even your cloth far away from the propeller.
- 2) Give a test after the battery is installed, turn the adapter's switch on, you will see indicate LED on it brighten, then operate the throttle stick, the boat will give corresponding action. After the test, turn the power of the boat and adapter off.

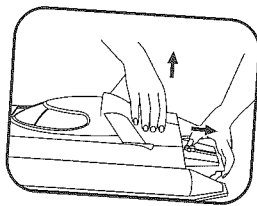

- ① Put the racing boat onto the frame firmly, pull the cover off.

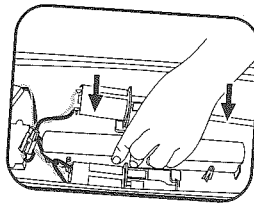


- ② Insert battery into slot of the cabin, confirm it is held tight.

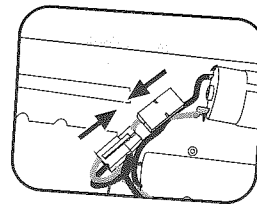




- ③ Plug battery to the socket of the receiver.

5. Assemble the cabin

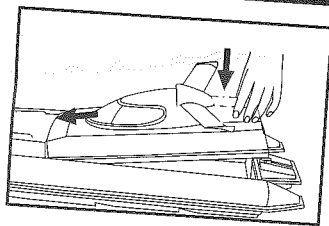

Put cover of main cabin onto its proper place and press the edge to fix it well.

6. Install antenna

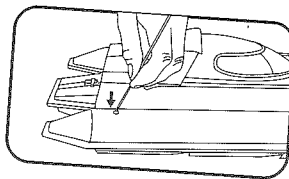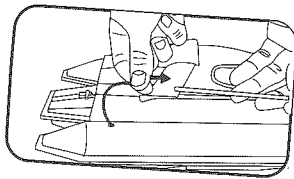


Put antenna cord through PVC tube and then insert the PVC tube into the hole on the hull.

7. Play

Note:

- 1) Children age 14 years below should play the boat by guide of adults.
- 2) Do not run the boat in swimming pool or public waterways; it may cause accidents or injury.
- 3) Look at water-surface to decide whether the racing boat can be played on it. Do not play if floater is too much to block the boat's running, or twist the propeller.
- 4) The remote controller works in about 50 square meter area. Do not run the boat so far that out of control; or it will be missing.
- 5) Do not play this racing boat continuously for more than 15 minutes. Take a next running after the boat's electric motor is cool.

8. Use the remote controller

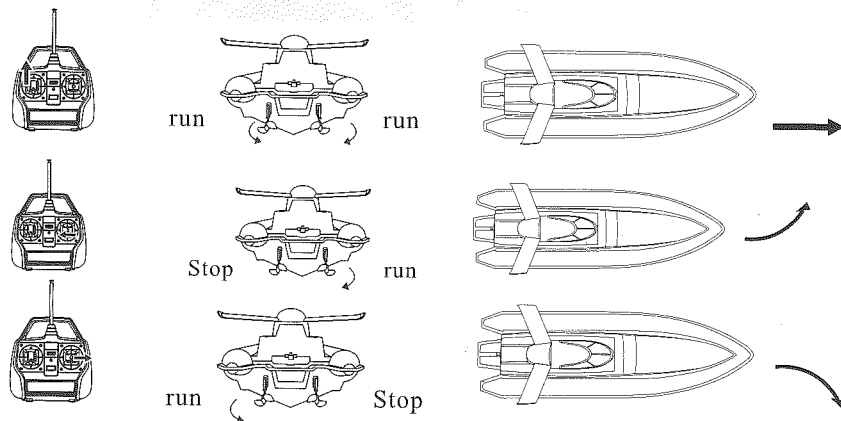


Pull up throttle stick, two propeller run and the boat drives forward. Then pull down throttle stick, the propellers stop working and the boat slows down. Pull direction control stick to the left, propeller on the boat's left side stops working but propeller on the right side runs, the boat turns left; then pull direction control stick to the right, propeller on the boat's right side stops working but propeller on the left side runs, the boat turns right instead.

9. Change propeller

Change a new propeller according to the following step (the stern of the boat will face to you).

- 1) When change the left propeller, press the transmission shaft one hand, revolve the propeller reverse of the clockwise direction, and then revolve a new one onto the shaft.
- 2) When change the right propeller, press the transmission shaft one hand, revolve the propeller clockwise, and then revolve a new one onto the shaft.

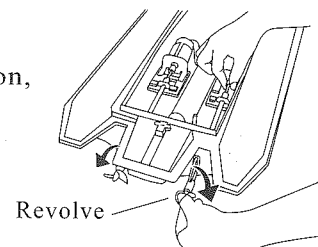

10. Maintenance after use

- 1) Take the battery out of the boat when it is not in use.
- 2) Never expose the boat into the straight sunlight for long time. Avoid the boat from greasy dirt to protect the cover. Use some mild detergent to clean the boat after running, and then wash the cover with branch water.
- 3) Before the boat is long time lying up, pull out the propeller shaft, apply grease on it, and store it in a dry area. Drop some lubricating oil into the copper tube in the boat for next assembly.

Notice: Confirm the install place before the motor and the propeller shaft are re moved, so that you can reinstall them in right place. (Remove the propeller, get loose of the screws, put them out to the motor, then pull out the propeller shaft.)



Imported By
Teknikmagasinet Sweden AB
Fakturavägen 9,
S-175 62 Järfälla,
Sweden



Made in China